

HARTREX™



Superior Water, Chemical and Abrasion Resistance - High Temperature



Harbour
INDUSTRIES

HARTREX I™

Construction

Solid bare copper conductor


Extruded Polyetheretherketone Thermoplastic

260° C Operating Temperature

Application: Magnet wire for Electrical Submersible Pump Motor

Solid AWG	OD	Weight/mft
7	.158"	65
7 1/2	.150"	58
8	.142"	52
8 1/2	.135"	46
9	.128"	41
9 1/2	.122"	37
10	.116"	33
10 1/2	.110"	29
11	.105"	26
12	.095"	21

Additional sizes available - contact factory

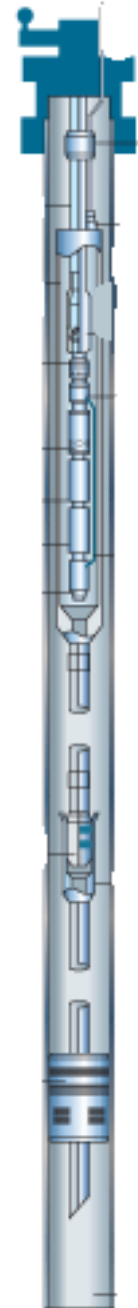

ESP
Electrical Submersible
Pump